

POLIPASTO ELECTRICO DE CADENA TIPO "R"

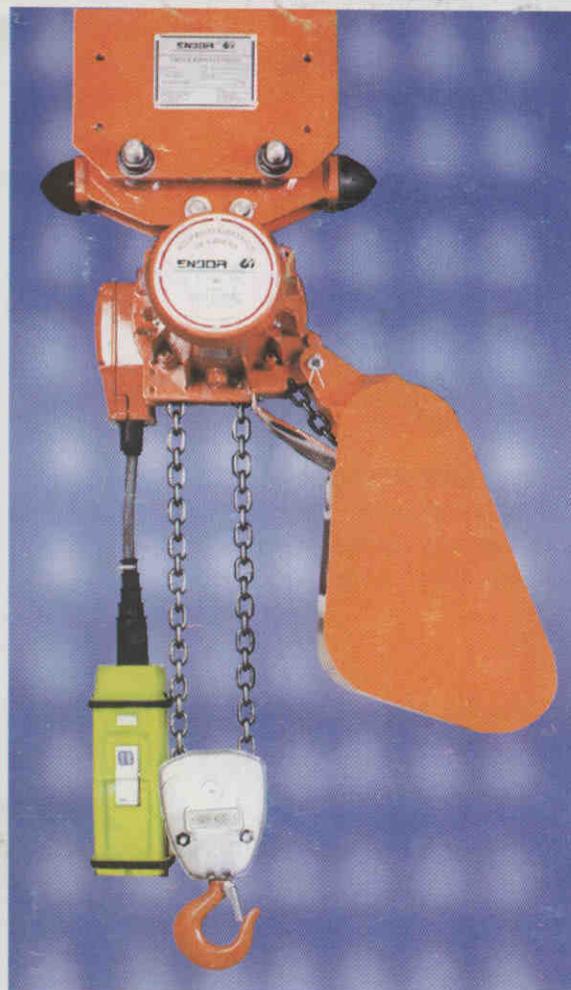


TABLA DE SELECCION

MODELO	CAPACIDAD DE CARGA (KGS.)	VELOCIDAD DE ELV. M/MIN.	ALTURA DE ELEVACION	RAMALES DE CADENA	POTENCIA H.P.
R-6	300	7.0	3 MTS.	1	1.0
R-6	600	3.5	3 MTS.	2	1.0
R-6	900	2.3	3 MTS.	3	1.0
R-20/8	1250	8.0	3 MTS.	1	3.5
R-20/16	1000	16.0	3 MTS.	1	6.0
R-20 4/8	1250	8.0 y 4.0	3 MTS.	1	3.5/2
R-20/8	2500	4.0	3 MTS.	2	3.5
R-20/16	2000	8.0	3 MTS.	2	6.0
R-20 4/8	2500	4.0 y 2.0	3 MTS.	2	3.5/2
R-20/8	3750	2.7	3 MTS.	3	3.5
R-20/16	3000	5.4	3 MTS.	3	6.0
R-20 4/8	3750	2.7 y 1.3	3 MTS.	3	3.5/2
R-20/8	5000	2.0	3 MTS.	4	3.5
R-20/16	4000	4.0	3 MTS.	4	6.0
R-20 4/8	5000	2.0 y 1.0	3 MTS.	4	3.5/2