


Rev	Description	ECN	Date	Revised by	Approved by
1			2023-10-18	kapp	kapp

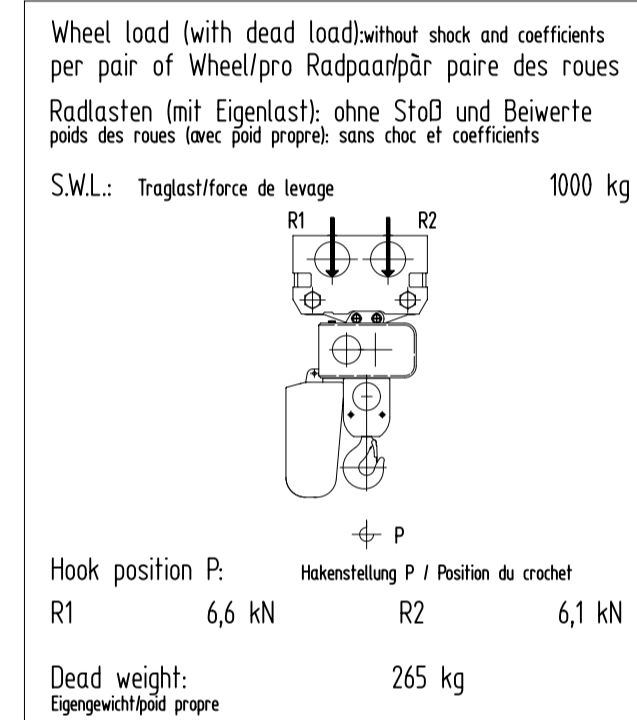

STAH CraneSystems	Electric-chain hoist Elektro-Kettenzug poutin électrique à chain	S.W.L.: 1000 kg Traglast force de levage
Type: ST 2010-10/16 1/1 ex	Group gear mechanical Gruppenmechanik	M4 to ISO nachselon
Lifting height: 30,00 m	Group lifting element Gruppenhebeelement	M4 to ISO nachselon
Hoist motor: Type 2/12 A2	Chain size: 7x21,9 Kettengröße/Taille du crochet	Hook size: RSN 04
Main hoisting speed: 12,00 m/min;	2,40 kW;	30 %ED; 180 s/h
Micro hoisting speed: 2,00 m/min;	0,33 kW;	15 %ED; 180 s/h
Carriage: Type KFN32.20 E	Runway: 205	Bend radius: 2,8 m
Hoisting class: H2	Stress group: B3	to DIN 15018
1.Travel speed: 25,0 m/min;	0,39 kW;	40 %ED;
2.Travel speed: 6,3 m/min;	0,08 kW;	20 %ED;
Supply voltage: 460 V;	60 Hz;	
Control voltage: 48 V; 60 Hz;	Mode of Protection: IP 66 EN 60529	
Explosion protection: Ex II 2 G...Gb/ Ex db eb IIB T4	ZONE 1	
Location: always indoor	ständig in der Halle	
Ambient temperature: -	°C (-20 bis +40°C)	

Approved	Date	Order department	Order No.	Scale	Total weight to	Sheet
kapp	2023-10-18	Order and Project Engineering		A1	265,00	1/1
Checked	Date	Title				Scale
kapp	2023-10-18	EX-PROOF HOIST				15
Designer	Date	Keywords				
kapp	2023-05-12					
Product/Project reference		Item ID				
765026-10		70119605				
Specification		Document ID				
ST2010-10/16EX11/KFN32.20E205GL		70119605-DRW1				

Serial No. : 11047237
 Fabrik-Nr.:
 Order No. : 765026-10
 Auftrags-Nr.:



This document and the information contained herein, is the exclusive property of STAH CraneSystems GmbH. It is not to be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written consent of STAH CraneSystems GmbH. © 2023 STAH CraneSystems GmbH. All rights reserved.